

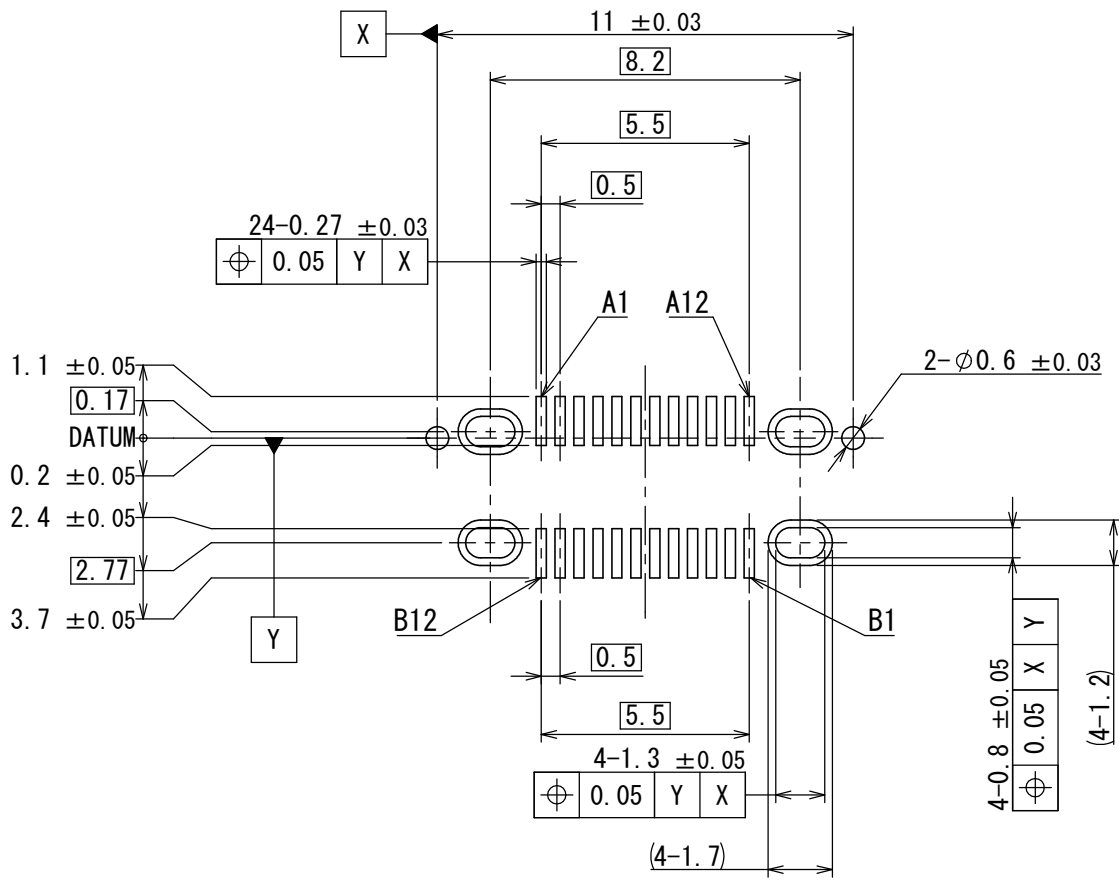
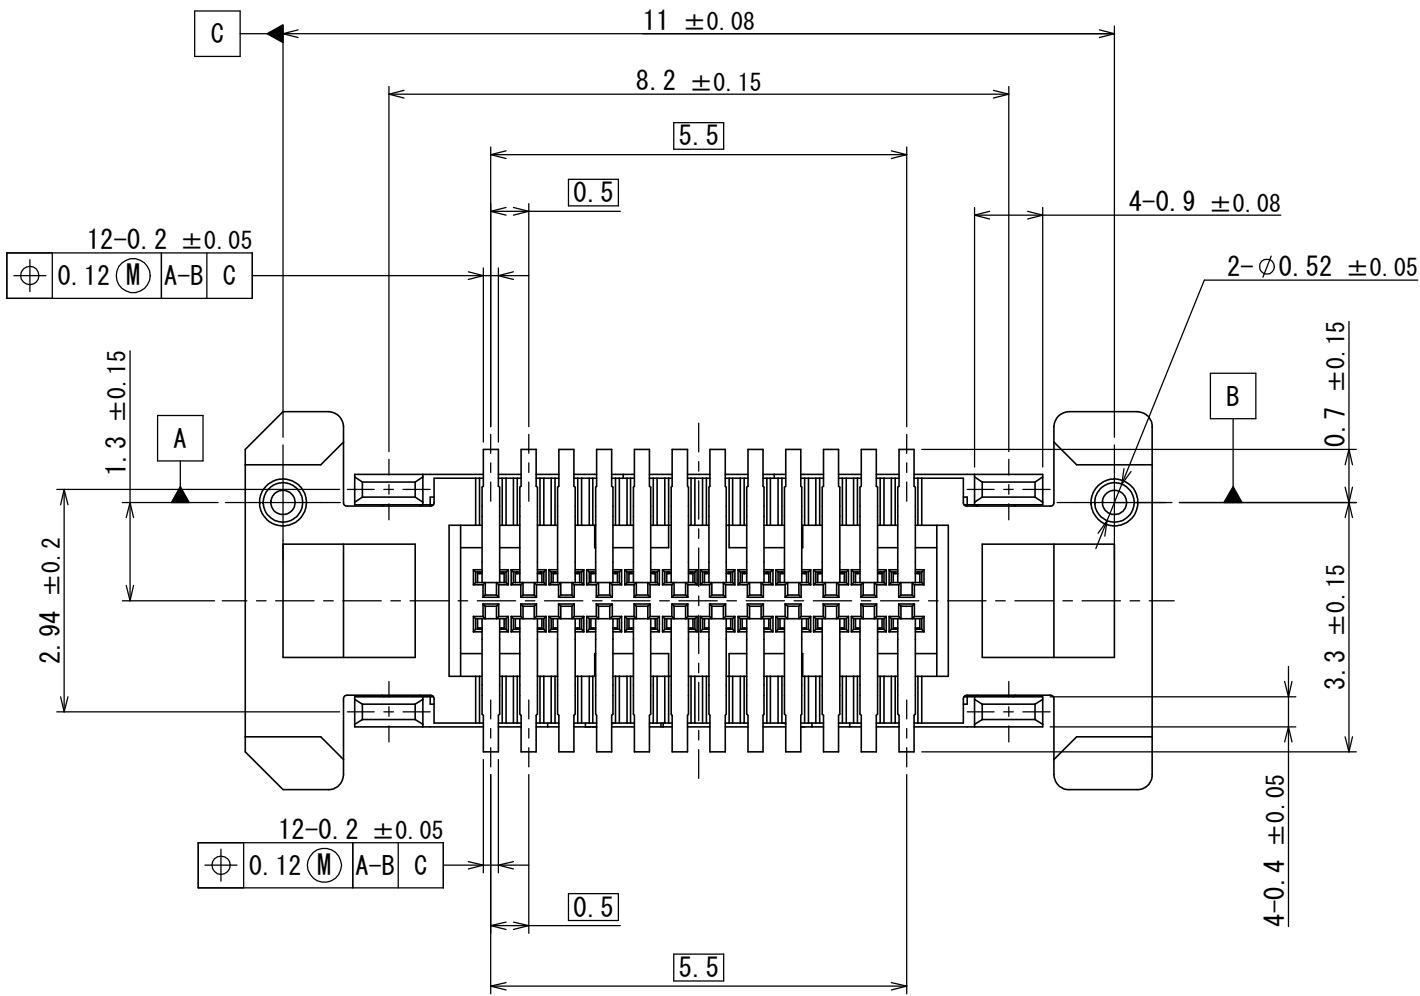
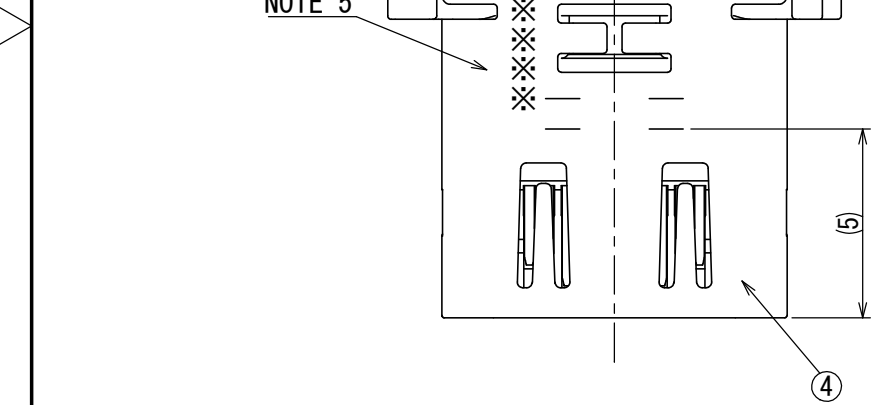
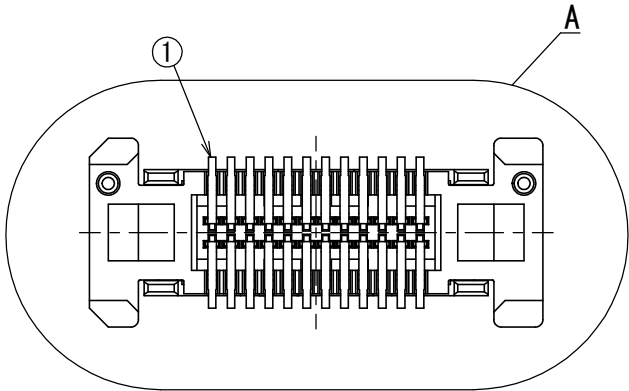


版数 VER.	年月日 DATE	図 NO.	変更内容 DESCRIPTION	製 図 DR.	担 当 CHK.	査 閲 APPD.	承認 APPD.
2	06/DEC/2016	019657	CORRECT AN ERROR	—	J. OOSAKA	—	Y. SAITOU
3	25/SEP/2018	026696	REVISED NOTE. etc	—	J. OOSAKA	—	Y. SAITOU

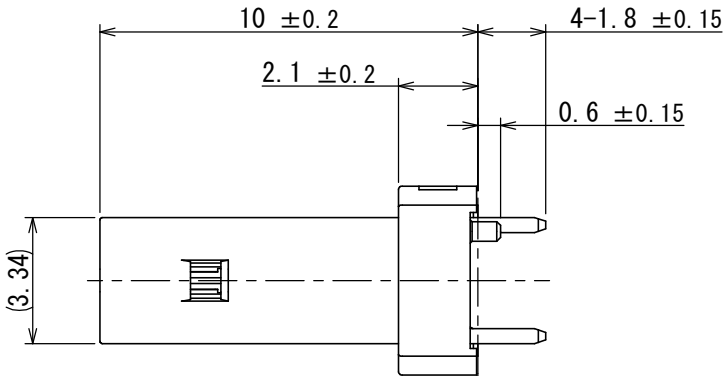

SURFACE VIEW FROM CONNECTOR MOUNTING SIDE.  
APPLICABLE P.C.B DIMENSION (REF.)  
適合基板寸法 (参考)



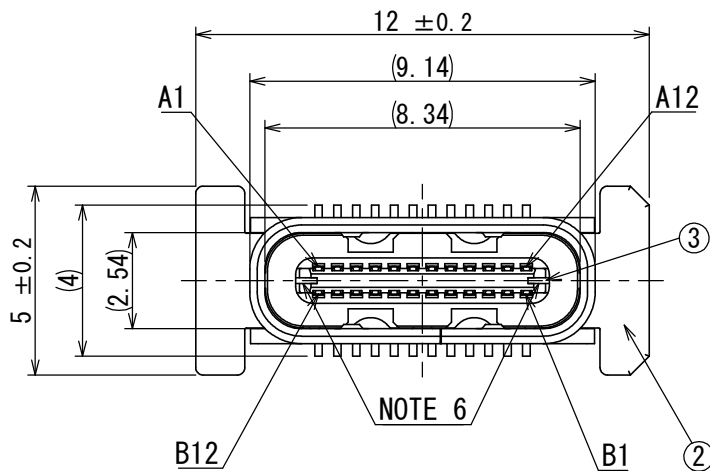


- NOTE 1. COPLANARITY OF SMT TERMINAL SHALL BE 0.1 MAXIMUM.
- NOTE 2. MATING DIMENSIONS CONSIST OF  
"Universal Serial Bus Type-C Cable and Connector Specification Revision 1.3"
- NOTE 3. THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.  
AS SUCH IT CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.  
REFERENCE THE USB TYPE C SPECIFICATION RELEASE 1.3, SECTION 3.2.1, NOTE 7.
- NOTE 4. VACUUM AREA.
- NOTE 5. LOT NO. IS MARKED AS SHOWN IN BELOW FIGURE MARKING.  
(EX.) 5 Y 0 3  
-5 : MANUFACTURE YEAR. (LAST 1 DIGIT OF A.D.)  
-Y : MANUFACTURE MONTH. (JAN. TO SEP. : 1 TO 9, OCT. : A, NOV. : B, DEC. : C)
- NOTE 6. METAL EXPOSED AREA SIZE COULD BE SLIGHTLY CHANGED BASED ON MOLDING PROCESS CONDITION IN EACH LOT,  
HOWEVER THIS WOULD NOT AFFECT CONNECTOR FUNCTION.
- NOTE 7. PIN ASSIGNMENT (FRONT VIEW)

Pin No.	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
	GND	TX1+	TX1-	V <sub>BUS</sub>	CC1	D+	D-	SBU1	V <sub>BUS</sub>	RX2-	RX2+	GND
Pin No.	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
	GND	RX1+	RX1-	V <sub>BUS</sub>	SBU2	D-	D+	CC2	V <sub>BUS</sub>	TX2-	TX2+	GND

5	CAP	1	THERMOPLASTIC RESIN	COLOR: BLACK	
4	SHELL	1	STAINLESS STEEL	NICKEL PLATING	
3	MID PLATE	1	STAINLESS STEEL	-	
2	INSULATOR	1	THERMOPLASTIC RESIN	COLOR: BLACK	
1	CONTACT	24	COPPER ALLOY	CONTACT AREA NICKEL: 2 μm MIN. PALLADIUM-NICKEL: 0.75 μm MIN. GOLD FLASH: 0.05 μm MIN. SOLDER TAILS: NICKEL: 2 μm MIN. GOLD FLASH: 0.03 μm MIN.	

仕様書 (SPECIFICATION)	第1版 (ORIGINAL DATE)	尺度 (SCALE)	シリーズ (SERIES)	名称 (TITLE)	図面番号 (DRAWING NO.)	版数 (VER.)
JACS-30368	30/SEP/2016	5:1	DX07	DX07S024WJ3	SJ117928	3
一般公差 (GENERAL TOLERANCE)	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.	質量 (MASS)	
寸法 (DIMENSION)	角度 (ANGLES)	単位 (UNIT) : mm				
±0.8	×° ±					
× ±0.4	×°' ±					
×× ±0.1						
××× ±						

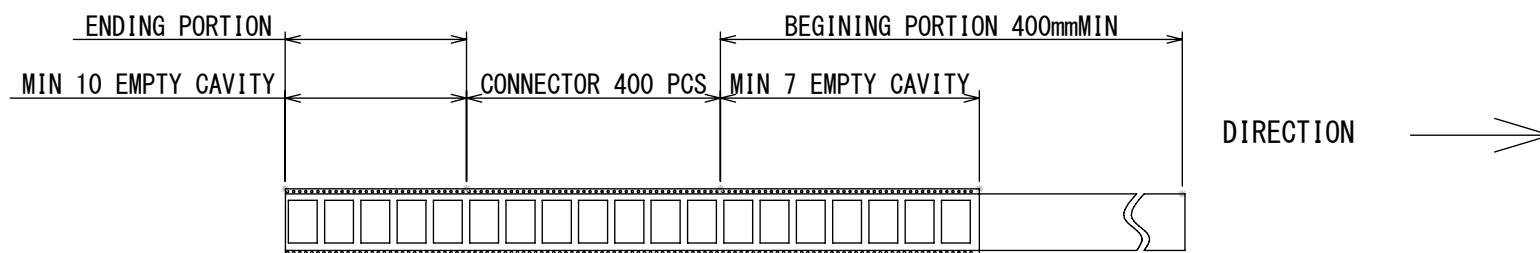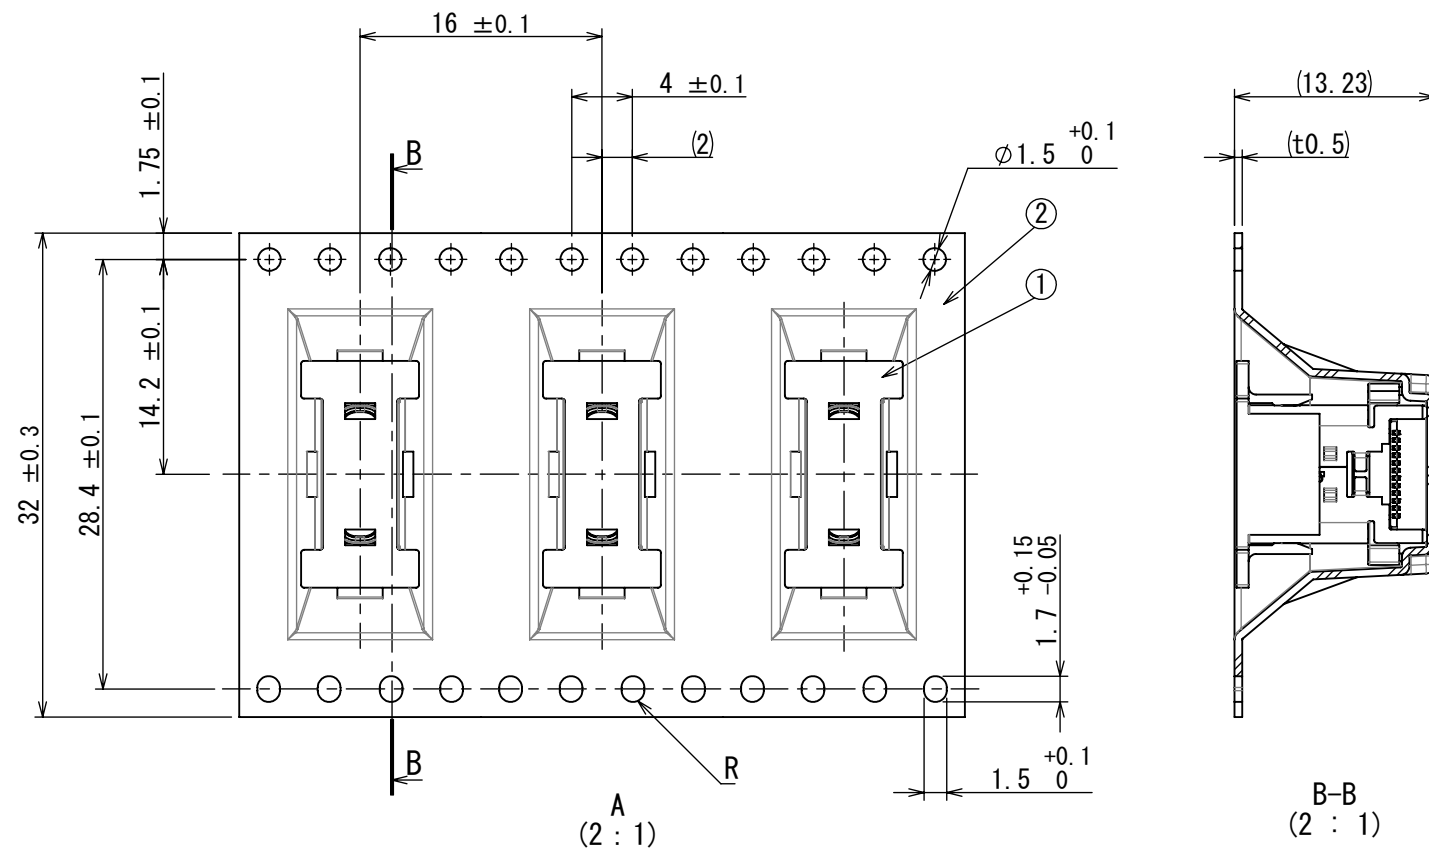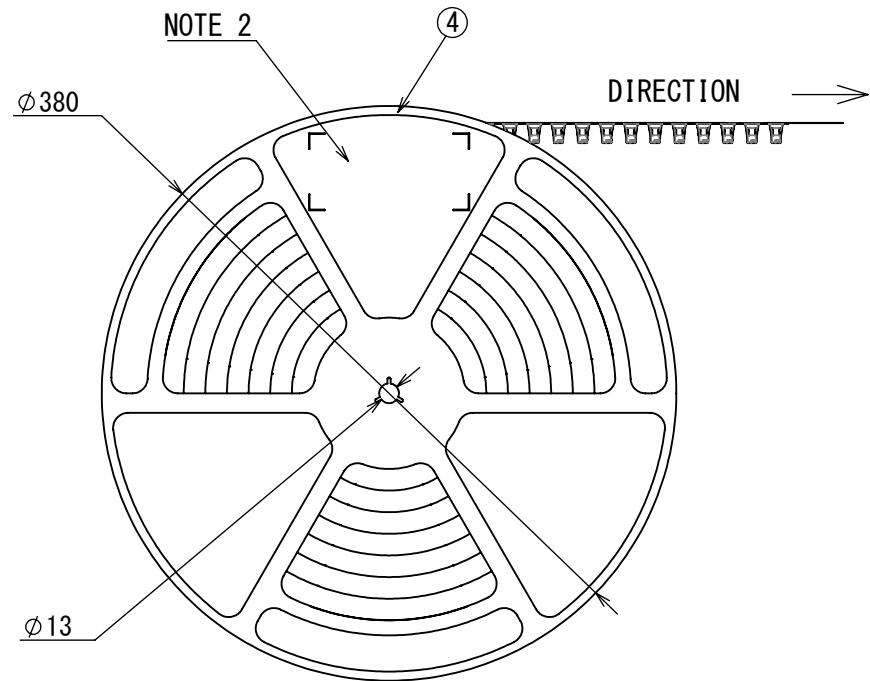

NOTE1. SUFFIX "R400" OF PART NUMMBER "DX07S024WJ3R400" INDICATES 400PCS IN REEL.  
2. THE LABEL IN WHICH DESCRIPTION , QTY, LOT NO, EMBOSS CODE AS INDICATED.  
3. REFER TO THE DRAWING "SJ117928 (DX07S024WJ3)" FOR THE CONNECTOR DIMENSIONS.  
4. REEL FORM MAY DIFFER FROM THE DRAWING.

R-Pb (Pb-Free)

台灣航空電子股份有限公司			
MADE IN *****			
品名	DX07S024WJ3R400		
収納数	400	個入	製造年月日
備考	TB3216		



COUNTRY OF MANUFACTURE

32: TAPE WIDTH

16: FEED PITCH

NUMBER OF CONNTECTOR

4	REEL	1	PS	—	—
3	COVER TAPE	1	PET	—	—
2	CARRIER TAPE	1	PS	—	—
1	DX07S024WJ3	400	—	—	SJ117928
符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	図 番 DWG NO.

仕様書 (SPECIFICATION) JACS-30368		第1版 (ORIGINAL DATE) 30/SEP/2016		尺度 (SCALE) 1:5		シリーズ (SERIES) DX07		日本航空電子工業株式会社		SIZE A3
一般公差 (GENERAL TOLERANCE)		製図 DR.		名称 (TITLE) DX07S024WJ3R400		 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.		図面番号 (DRAWING NO.) SJ117929	版数 (VER.) 1	
寸法 (DIMENSION)		担当 CHK.		査閲 APPD.						
角度 (ANGLES)		承認 APPD.		Y. SAITOU						
単位 (UNIT) : mm				質量 (MASS)						
±0.8		×° ±								
× ±0.4		×°×' ±								
×× ±0.1										
××× ±										

S/W