

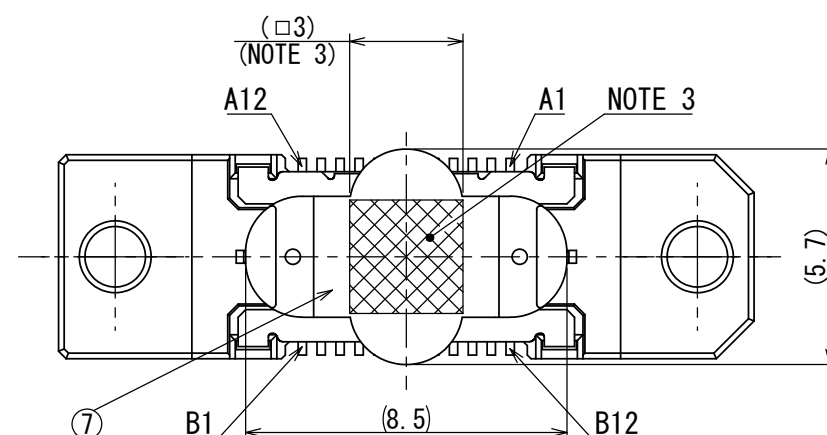







版数 VER.	年月日 DATE	CN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APP.	承認 APP.
2	17/MAY/2018	025192	ADD A NOTE. CONFORM MATING PART OF SHELL TO REAL PRODUCT FORM.		Y. YOKOYAMA	—	Y. SAITOU

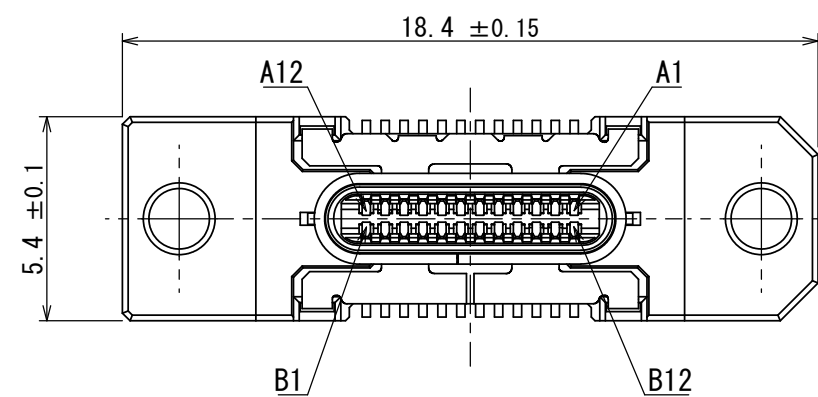

CAP ASSEMBLY CONDITION
(REF.) (5 : 1)

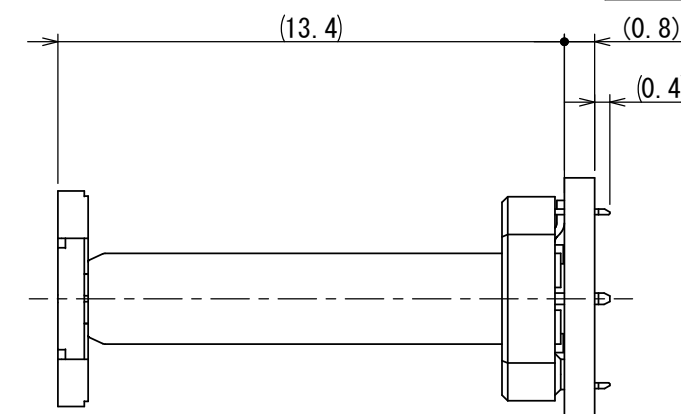

CAP ASSEMBLY AND MOUNTING
CONDITION (REF.) (5 : 1)

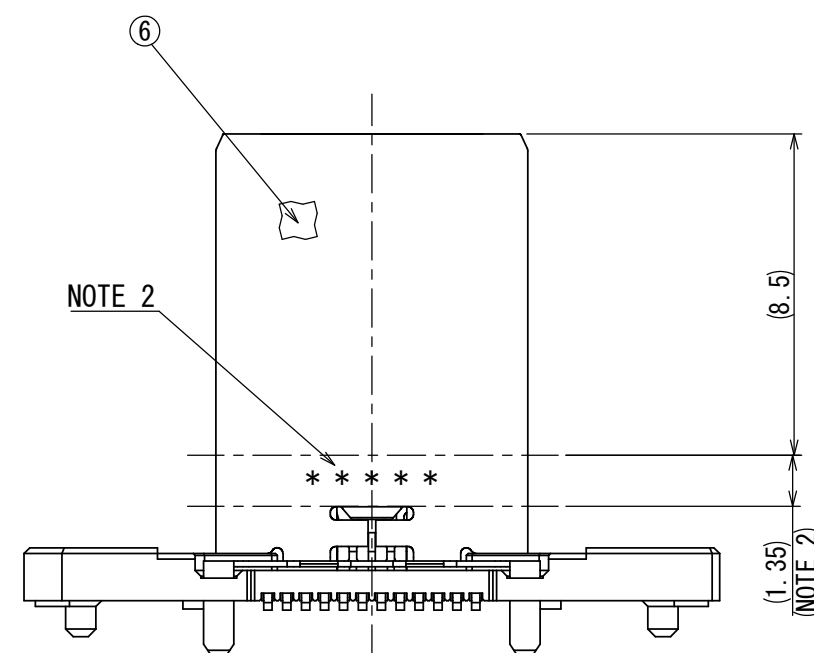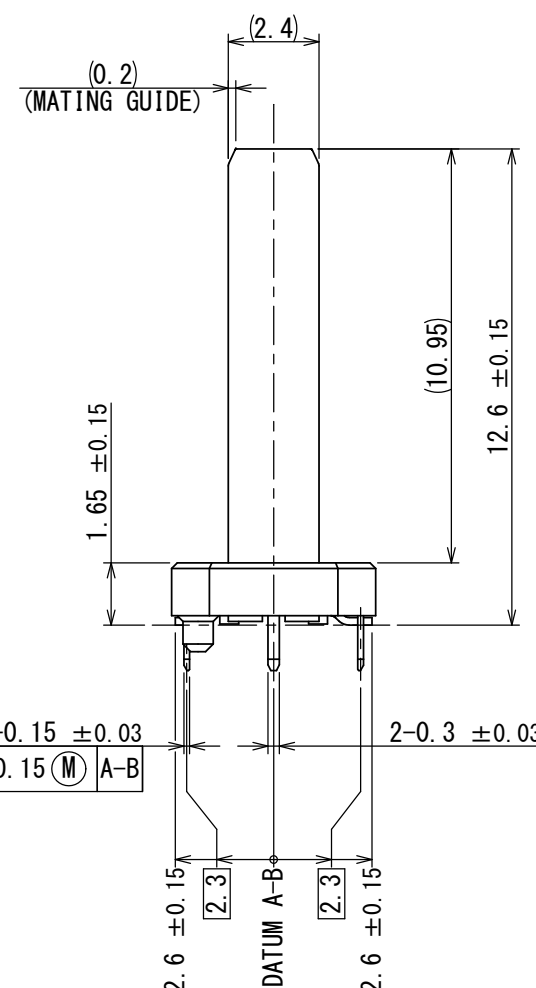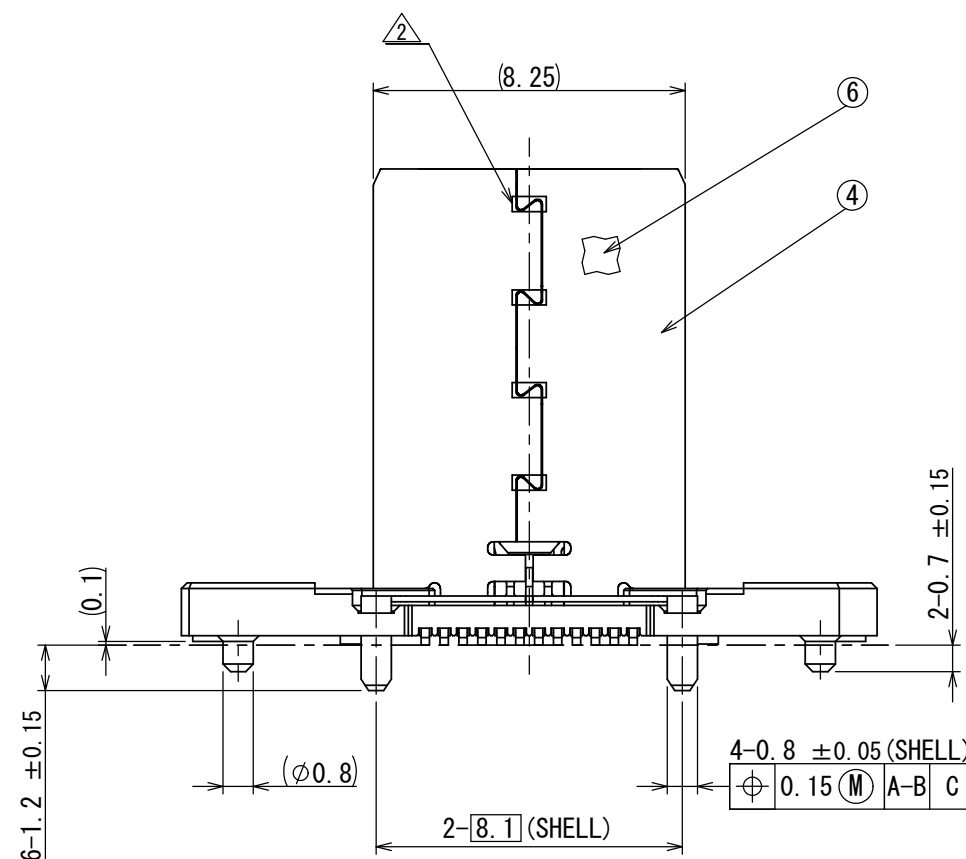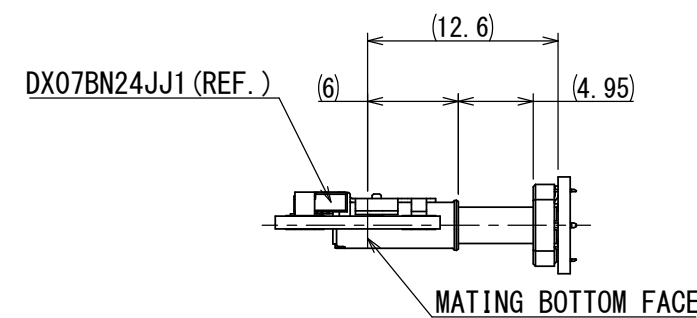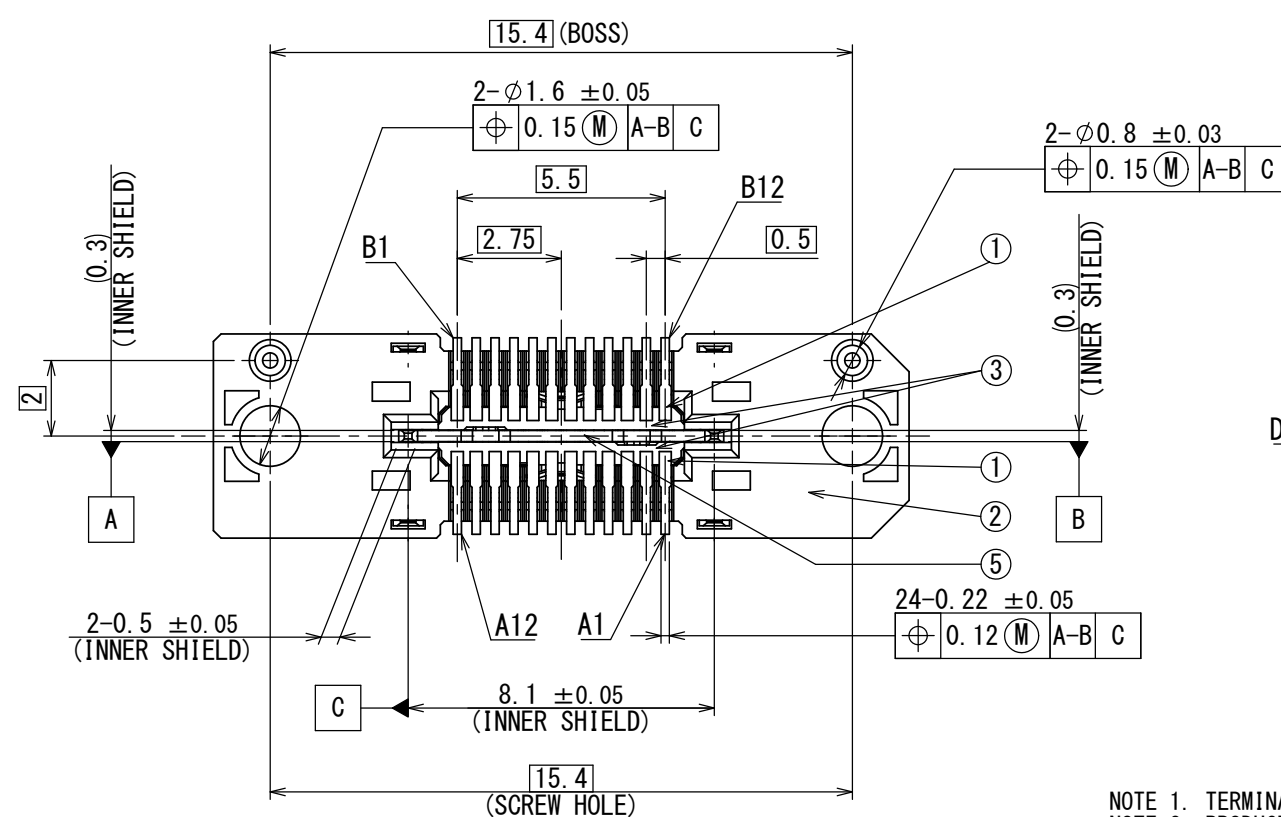
[illegible]

MATED CONDITION
(REF.) (2 : 1)



NOTE 1. TERMINAL COPLANARITY IS 0.1 MAX.
NOTE 2. PRODUCTION LOT NUMBER IS MARKED AS INDICATED. (LASER MARKING)
LOT NUMBER CONTENTS REFER TO TABLE-1.
NOTE 3. VACUUM AREA.
NOTE 4. STENCIL MASK OPENING PROHIBITION AREA.
NOTE 5. THE PACKING METHOD SHALL BE AS SPECIFIED IN SJ119573.
NOTE 6. THIS PRODUCT IS MATING COMPATIBLE WITH TYPE C RECEPTACLE, BUT IS NOT COMPLIANT WITH USB TYPE C SPECIFICATION.
NOTE 7. PIN ASSIGNMENT (FRONT VIEW)



Pin No.	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
	GND	RX2+	RX2-	V _{BUS}	SBU1	D-	D+	CC	V _{BUS}	TX1-	TX1+	GND
	GND	TX2+	TX2-	V _{BUS}	Vconn			SBU2	V _{BUS}	RX1-	RX1+	GND
Pin No.	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

2 NOTE 8. METAL MASK OPENING RATE OF THE SMT TERMINAL SHOULD BE SET UP WITH 100%.

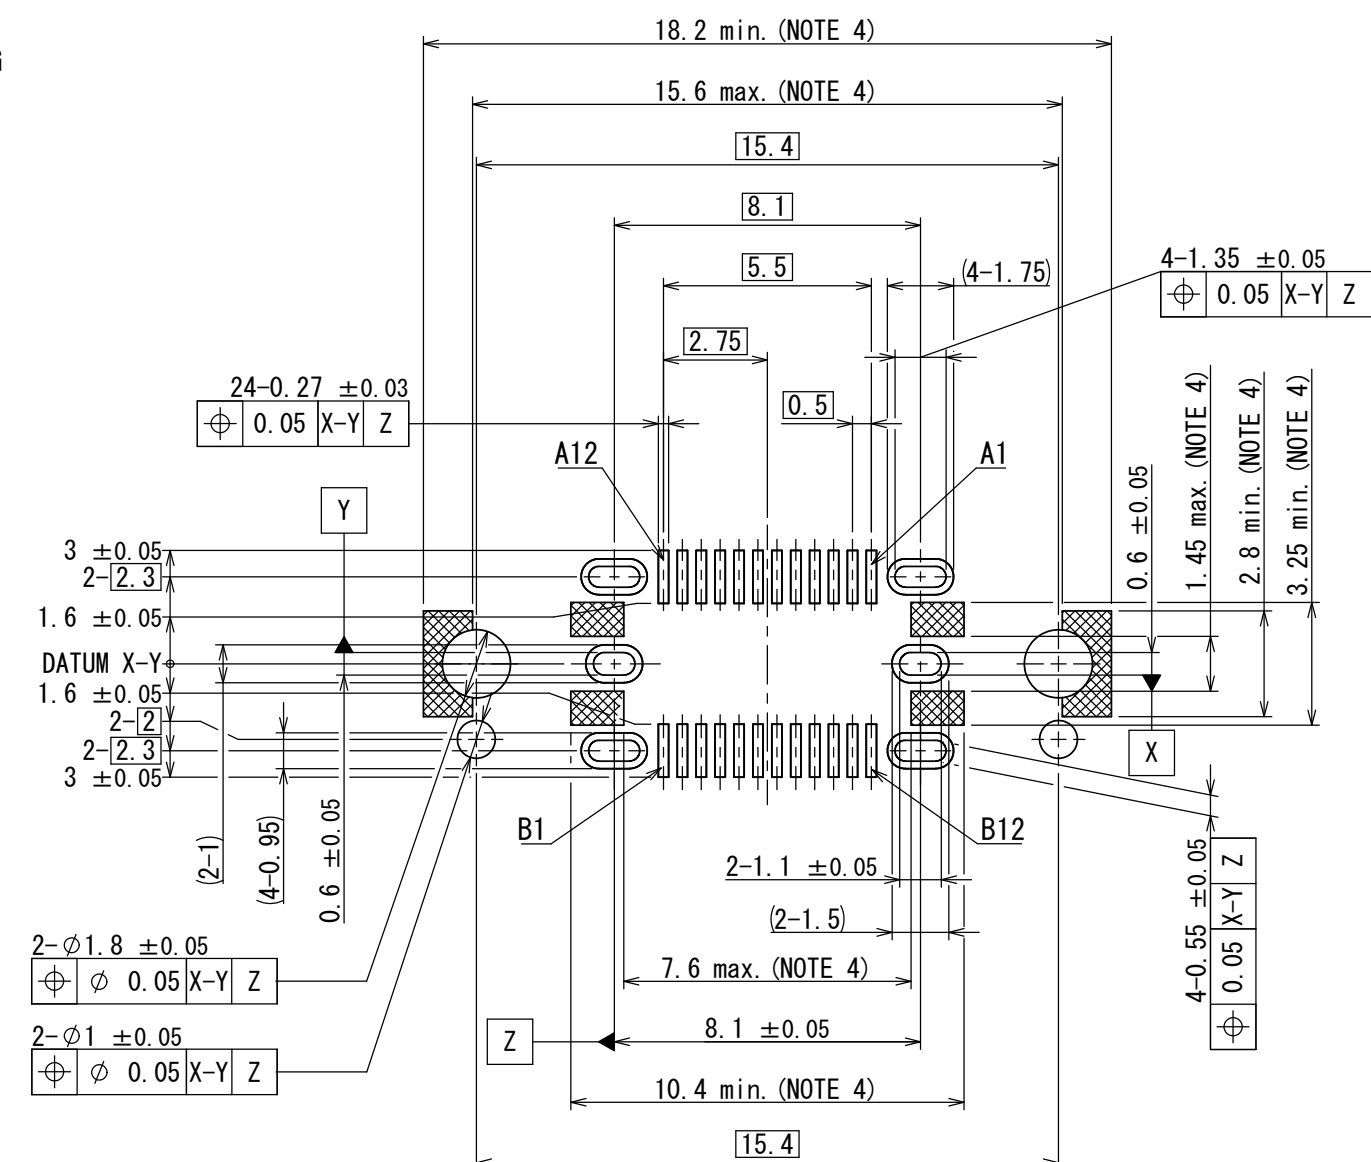

SURFACE VIEW FROM CONNECTOR MOUNTING SIDE
APPLICABLE P.C.B DIMENSION
(REF.) (5 : 1)

7	CAP	1	HEAT RESISTING PLASTICS	—	COLOR:BLACK
6	TAPE	2	POLYIMIDE	—	—
5	INNER SHIELD	1	STAINLESS STEEL	NICKEL PLATING	NICKEL:0.5μm MIN.
4	SHELL	2	STAINLESS STEEL	NICKEL PLATING	NICKEL:0.5μm MIN.
3	BACK INSULATOR	2	HEAT RESISTING PLASTICS	—	COLOR:BLACK
2	FRONT INSULATOR	1	HEAT RESISTING PLASTICS	—	COLOR:BLACK
1	CONTACT	24	COPPER ALLOY	CONTACT AREA: GOLD OVER NICKEL TERMINAL AREA: GOLD FLASH OVER NICKEL	CONTACT AREA: NICKEL:1.5μm MIN. GOLD:0.1μm MIN. SOLDER TAILS: NICKEL:1.5μm MIN. GOLD FLASH:0.03μm MIN.
符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE) 01/MAR/2018		尺 度 (SCALE) 5:1	JAE-CONNECTOR CO. シリズ (SERIES) DX07 日本航空電子工業株式会社
JACS-30353-12		製図 DR.		名称 (TITLE)	
一般公差 (GENERAL TOLERANCE)		担当 CHK.	Y. YOKOYAMA	DX07VN24WA2	 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
寸法 (DIMENSION)		角度 (ANGLES)	查閱 APPD.		
±0.8		×° ±	J. OOSAKA		
× ±0.4		×°×' ±	承認 APPD.		
×× ±0.1			Y. SAITOU		図面番号 (DRAWING NO.)
××× ±		単位 (UNIT) : mm		質量 (MASS)	 SJ119572


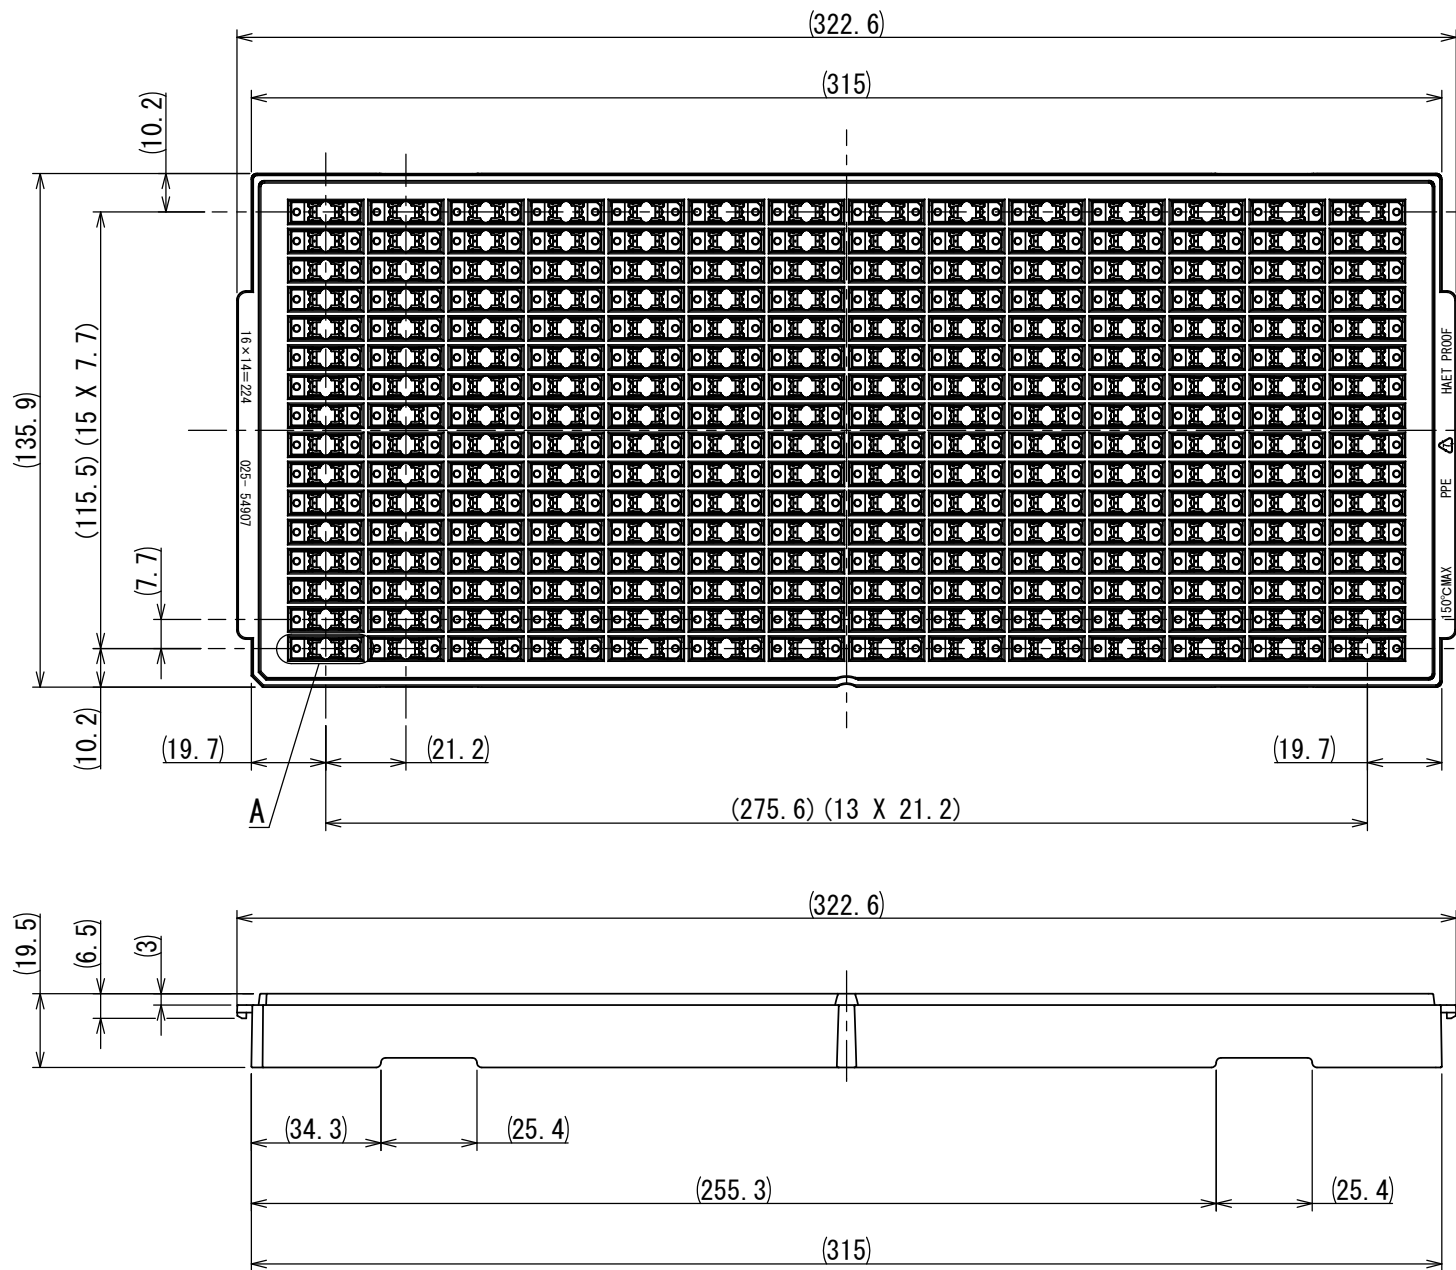


1568 PCS PACKING CONDITION.
(1 : 10)

NOTE 1. SUFFIX "C1568" OF PART NUMBER "DX07VN24WA2C1568" INDICATES 1568 PCS IN CARDBOARD BOX. STANDARD PACKING QUANTITY IS 1568 PCS.
(224 PCS/TRAY X 7 TRAYS/CARDBOARD BOX = 1568 PCS/CARDBOARD BOX).
THE DETAIL OF PACKING METHOD SHALL BE AS SPECIFIED IN JACS-30353-12.

NOTE 2. REFER TO THE DRAWING "SJ119572 (DX07VN24WA2)" FOR THE CONNECTOR DIMENSIONS.

NOTE 3. VACUUM AREA.

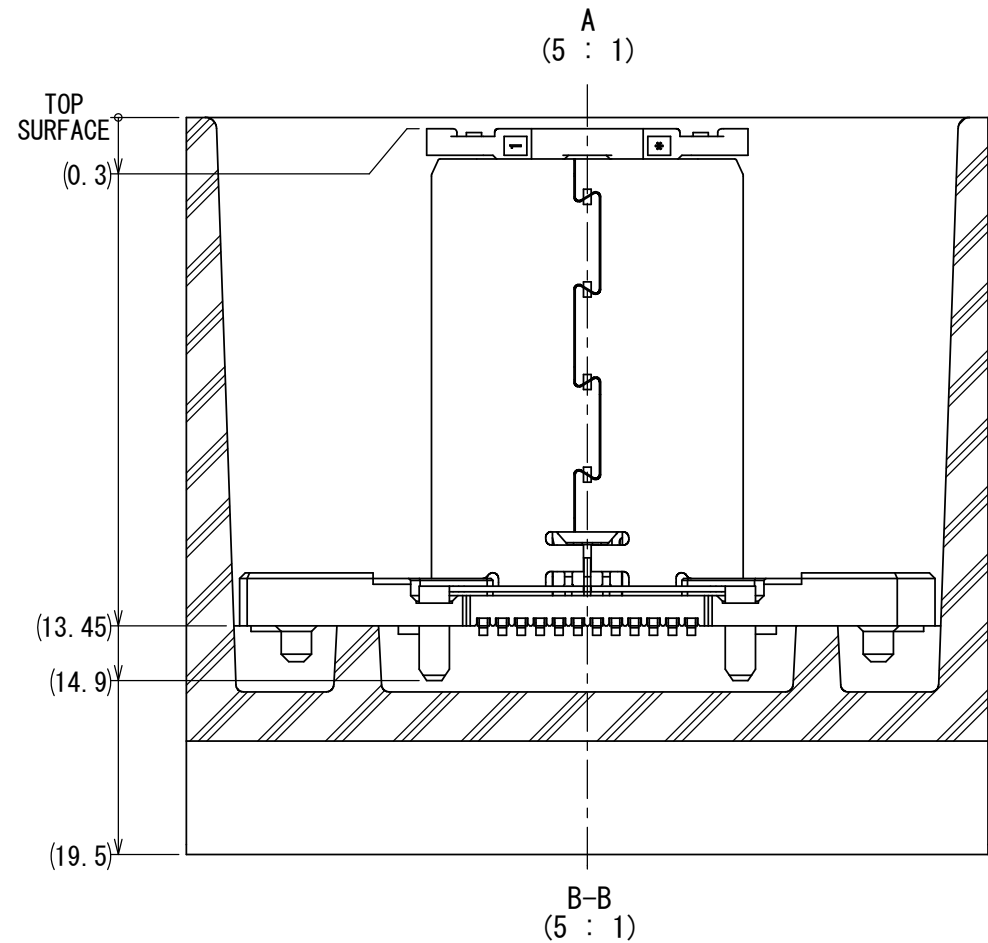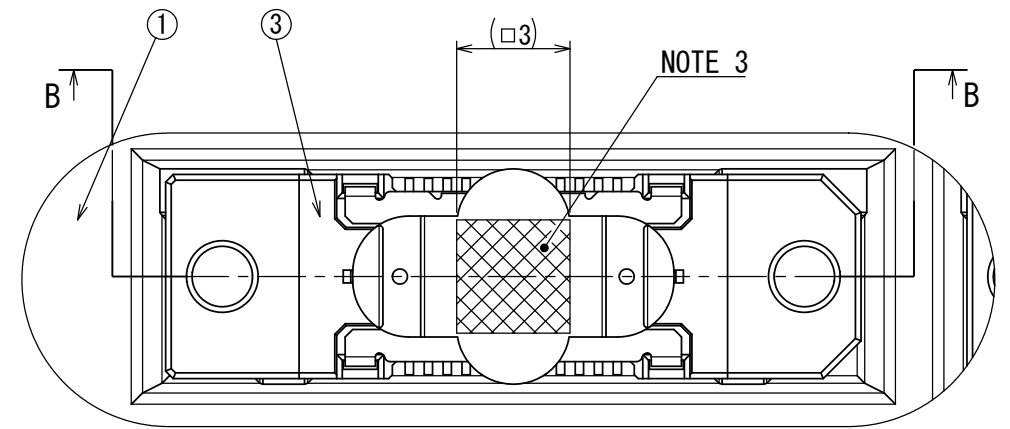

3	DX07VN24WA2	1568	-	-	SJ119572
2	COVER FOR TRAY	1	PPE	-	-
1	TRAY	7	PPE	-	-
符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS

仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE) 01/MAR/2018		尺度 (SCALE) 1:2	シリーズ (SERIES) DX07	日本航空電子工業株式会社 JAE JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.	図面番号 (DRAWING NO.) SJ119573	版数 (VER.) 1
JACS-30353-12		製図 DR.		名称 (TITLE) DX07VN24WA2C1568				
一般公差 (GENERAL TOLERANCE)		担当 CHK.	Y. YOKOYAMA					
寸法 (DIMENSION)		査閲 APPD.	J. OOSAKA					
角度 (ANGLES)		承認 APPD.	Y. SAITOU					
単位 (UNIT) : mm				質量 (MASS)				
± 0.8		×° ±						
× ± 0.4		×°×' ±						
×× ± 0.1								
××× ±								