

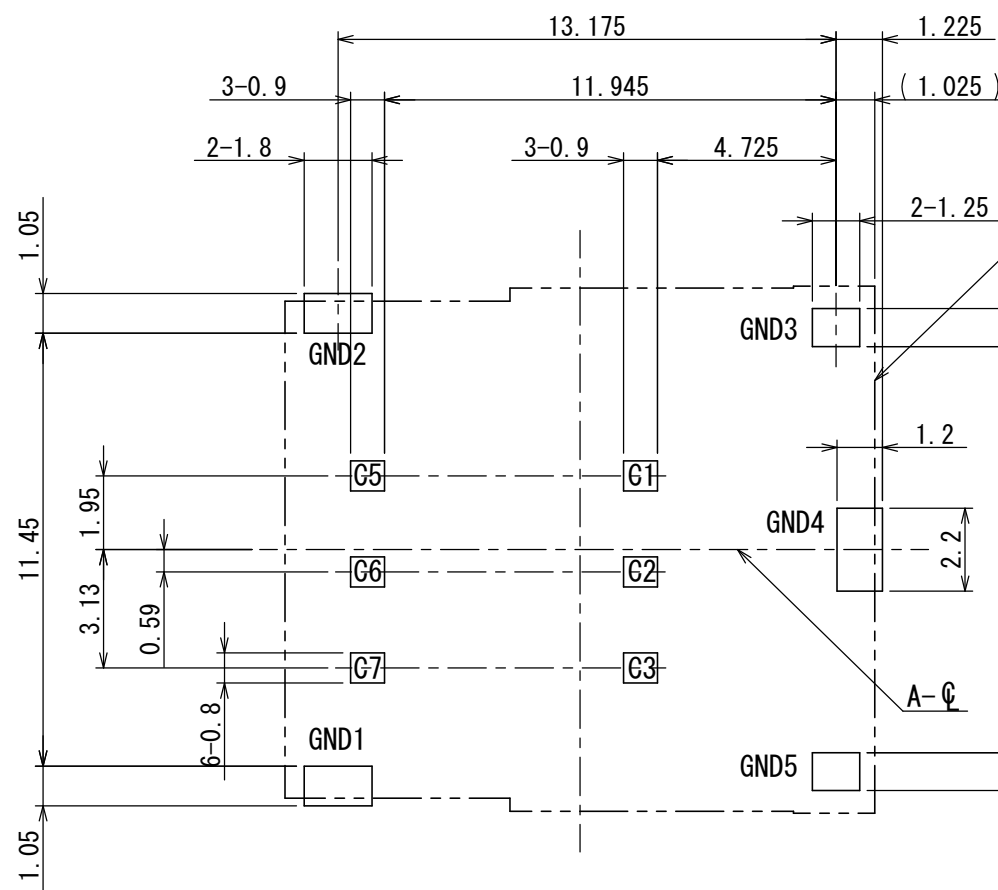
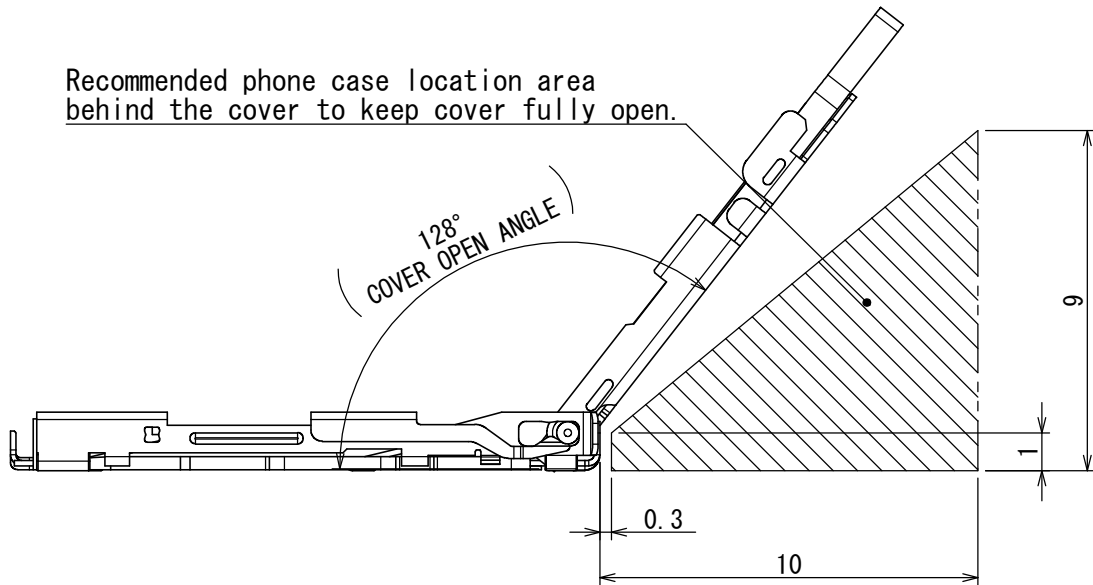


版数 VER.	年月日 DATE	図 NO.	変更内容 DESCRIPTION	製 図 DR.	担 当 CHK.	査 閲 APPD.	承認 APPD.
2	15/APR/2014	004608	ADDED DIMENSION		M. SHIMADA	—	A. NATORI

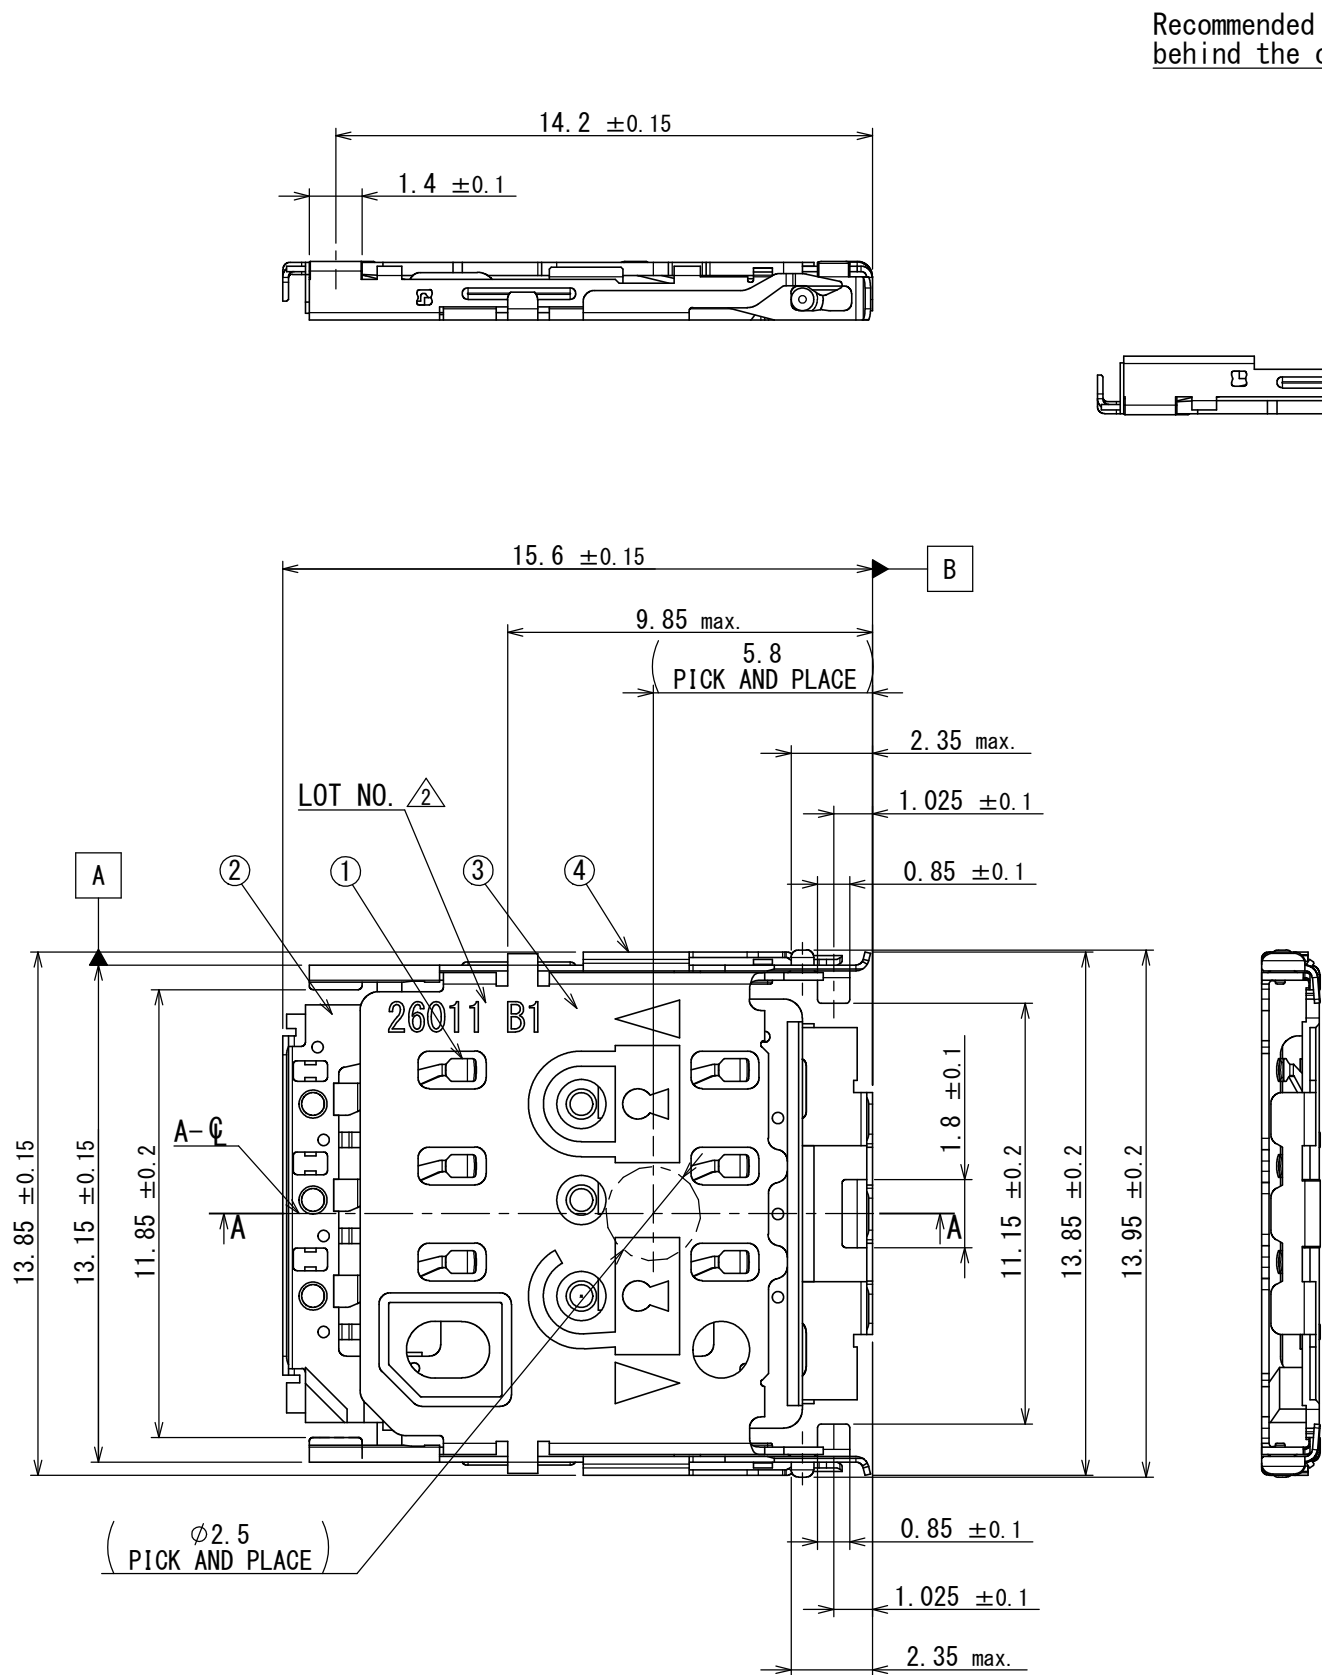


APPLICABLE PWB. DIMENSION FOR PAD LAYOUT (REF.)

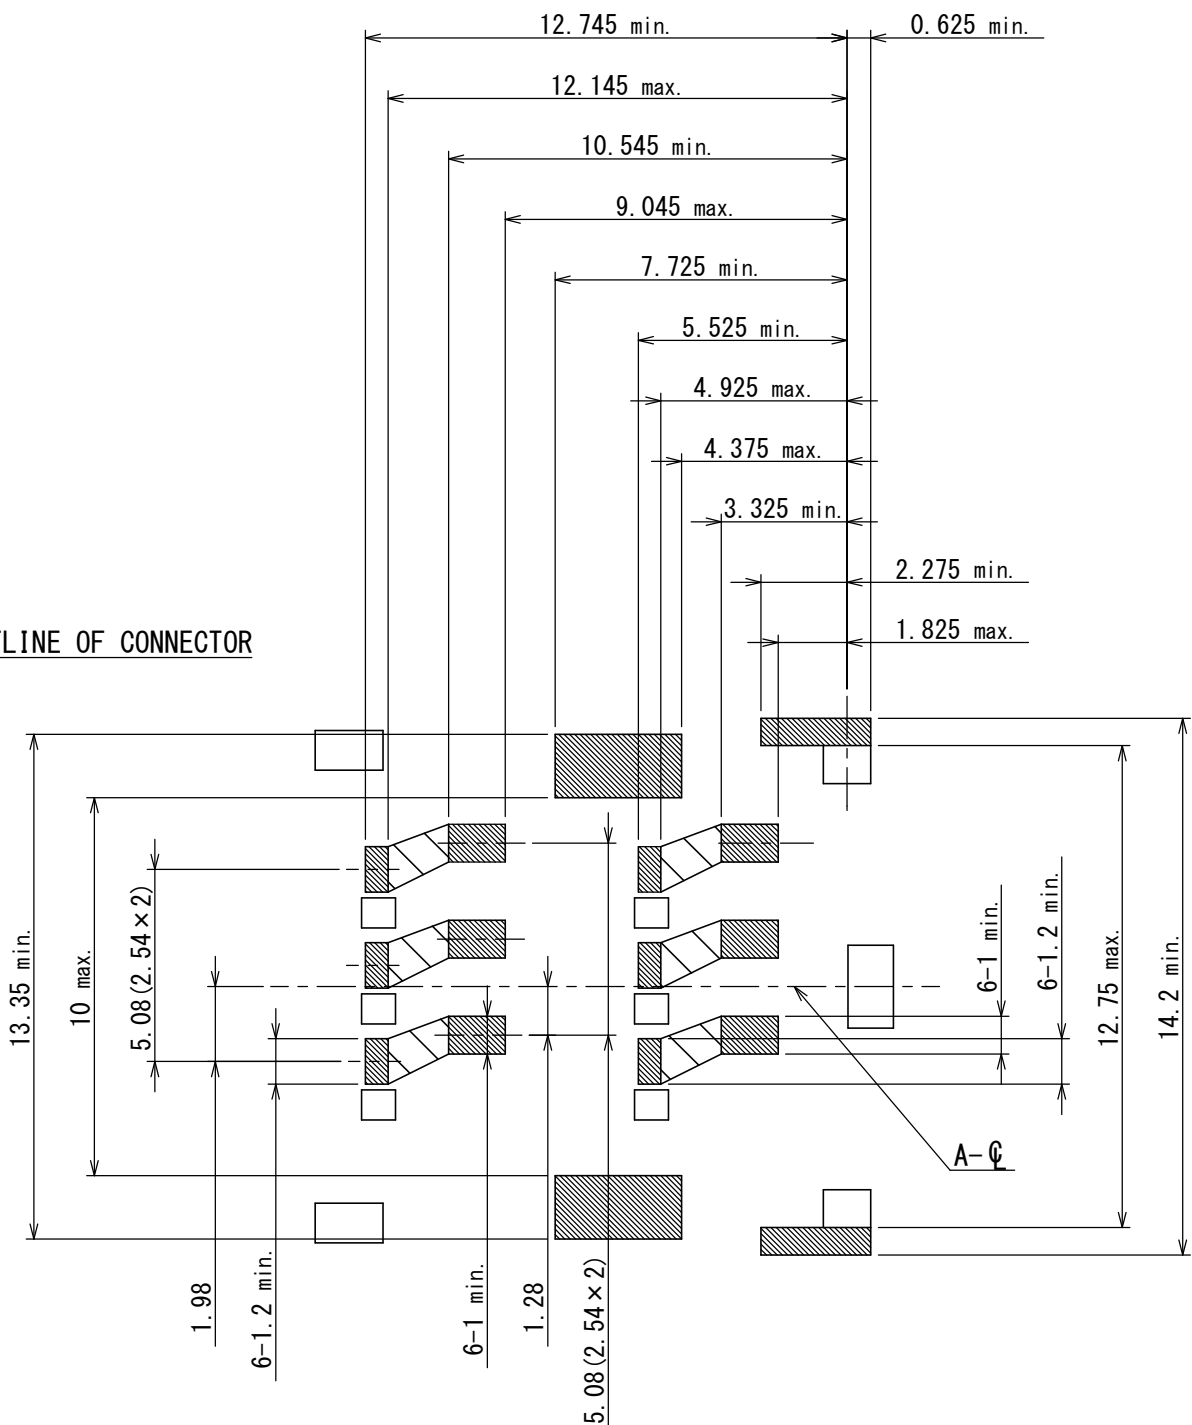

RESTRICTED AREA (No pattern and Via hole)

All the pattern and Via holes under the connector should be coated by resist.

APPLICABLE PWB. DIMENSION FOR RESTRICTED AND INSULATION AREA (REF.)

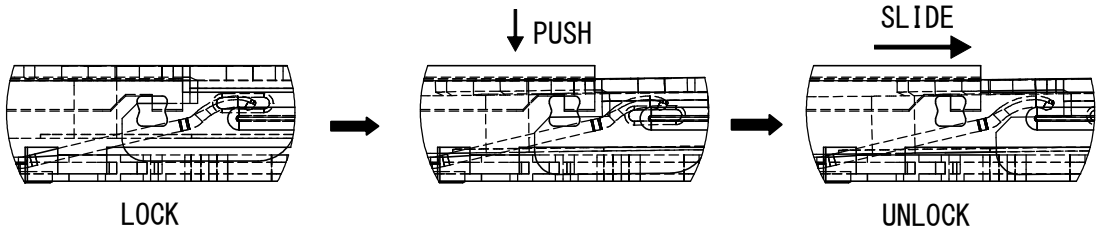

NOTE1. COPLANARITY 0.08mm max.  
NOTE2. LOT INFORMATION IS SHOWN AS BELOW.  
e.g. 26011

PRODUCTION LINE NO.

PRODUCTION DATE (YMDD)

TABLE 1. FINISH

PART No.	PART NAME	TERMINAL AREA / LOCK HINGE AREA	CONTACT AREA
1	CONTACT	Au FLASH OVER Ni (1 μm MIN.)	Au (0.5 μm MIN.) OVER Ni (2~6 μm)
4	GROUND-FRAME		—

4	GROUND-FRAME	1	COPPER ALLOY	TABLE 1	
3	COVER	1	STAINLESS	—	
2	HOUSING	1	GLASS FILLED LCP	—	
1	CONTACT	6	COPPER ALLOY	TABLE 1	

仕様書 (SPECIFICATION) JACS-10936	第1版 (ORIGINAL DATE) 01/JUN/2012	尺度 (SCALE) 5:1	シリーズ (SERIES) SF15	日本航空電子工業株式会社
一般公差 (GENERAL TOLERANCE) 寸法 (DIMENSION) ±0.8 × ±0.4 × × ±0.1 × × × ±	角度 (ANGLES) ×° ± ×° ×' ± 単位 (UNIT): mm	製図 DR. 担当 CHK. 査閲 APPD. 承認 APPD.	M. SHIMADA — A. NATORI	名称 (TITLE) SF15W006S4B
質量 (MASS)			図面番号 (DRAWING NO.) SJ113074	版数 (VER.) 2

